


# Marking Tubes and Labels

**MAX**®

Electronic Lettering Machine

# LETATWIN™

## LM-390A/PC

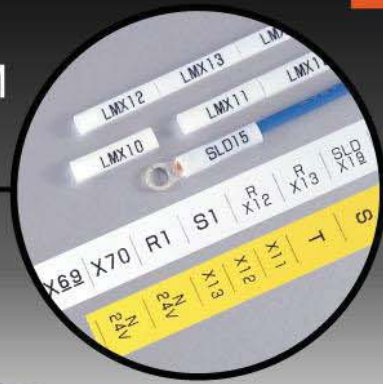

Included  
PC EDITOR



New Model



Comes with plastic carry case

## Professional choice for your marking job!

The class's fastest marking job!

High volume memory!

USB makes PC access easier!





# DEVELOPED FOR HEAVY USERS

## High-speed marking

LM-390A/PC has an enhanced feeding system that provides you with marking speed at 35mm/second. LM-390A/PC can make approx 50pcs of 20mm-length tube per minute.


For marking on Tube	Marking time	
	LM-380A	100
	MAX previous model	
	LM-390A/PC	70 <b>Saving time 30%!!</b>

## Maximum 100,000 characters built-in large memory storage

	LM-380A	LM-390A/PC
Internal memory	40,000	100,000
Characters	2,000	5,000 per file, up to 50 files

## Easy access from your PC with USB

LM-390A/PC features USB port for direct connection with Windows personal computer, as well as USB memory slot for off-the-line data exchange with Windows personal computer by "LETATWIN PC EDITOR".

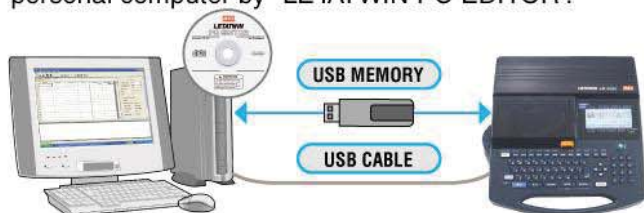

## Cutting Depth Adjustment

You can adjust the half cutting depth with the "Half cutting depth adjustment lever", when half cutting is too deep.



## SPECIFICATIONS

ITEMS	CONTENTS
Name	MAX ELECTRONIC LETTERING MACHINE LM-390A/PC
Dimensions	275(W)×300(D)×91(H) mm
Weight	2.3kg
Printing method	Thermal transfer method (300dpi)
Display	LCD dot matrix: 64×160 Pixel (Backlit)
Printing speed	35mm/s (Standard) 20mm/s (Low temperature mode)
Maximum Printing length	Tube: 20m, Tape: 5m
Maximum number of characters to input	5,000 characters per file
Character size	2,3,4,6mm height
Usable tube	φ 2.5mm~6.5mm (PVC tube, Shrinkable tube)
Usable tape	Width 5, 9, 12mm (Max genuine tape)
Tube cutting method	Auto half cut, manual full cut
Internal memory	100,000 characters (Maximum 50 files)
External memory	USB memory
Interface	USB 2.0 full speed
Power supply	DC12V, 3.3A <small>Use only specified AC Adapter (100V~240V) included in the package</small>
Power consumption	Max 16W
Operating environment	10°C to 35°C

## Large and backlit LCD display

Backlit LCD display makes your confirmation of input contents easy, even if you work in dim jobsite.



## The pitch can be set up to maximum 60mm

Marking on tape: 4 up to 60mm

Marking on tube: 10 up to 60mm \* (Auto pitch function is available for more than 60mm)\*



## Marking Materials

φ2.5mm~φ6.5mm PVC tubes and Heat-shrinkable tube are applicable. MAX genuine tapes of 5mm, 9mm and 12mm width are available.



## Economical refill-type ink ribbon.



## CONSUMABLES

<b>INK RIBBON CASE</b> LM-RC310 10PCS/BOX	
<b>ECONOMICAL INK RIBBON</b>	
LM-IR300B (BLACK)	50m/ROLL 5 ROLLS/BOX
<b>INK RIBBON FOR HEAT SHRINKABLE TUBE</b>	
LM-IR300BP (BLACK)	50m/ROLL 5 ROLLS/BOX
LM-IR300W (WHITE)	32m/ROLL 5 ROLLS/BOX
<b>UL STANDARD COMPLIANT TUBE</b>	
LM-TU332N2 WHITE	φ3.2mm×100m/ROLL 1 ROLL/BOX
LM-TU336N2 WHITE	φ3.6mm×100m/ROLL 1 ROLL/BOX
LM-TU342N2 WHITE	φ4.2mm×80m/ROLL 1 ROLL/BOX
LM-TU352N2 WHITE	φ5.2mm×80m/ROLL 1 ROLL/BOX
<b>MAX HIGH QUALITY TUBE</b>	
LM-TU432L WHITE	φ3.2mm×200m/ROLL 1 ROLL/BOX
LM-TU436L WHITE	φ3.6mm×200m/ROLL 1 ROLL/BOX
LM-TU442L WHITE	φ4.2mm×200m/ROLL 1 ROLL/BOX
LM-TU452L WHITE	φ5.2mm×135m/ROLL 1 ROLL/BOX
LM-TU464L WHITE	φ6.4mm×100m/ROLL 1 ROLL/BOX
<b>TAPE CASSETTE</b>	
LM-TP305Y (YELLOW)	5mm(W)×8m(L)/PC 10PCS/BOX
LM-TP305W (WHITE)	5mm(W)×8m(L)/PC 10PCS/BOX
LM-TP305T (TRANSPARENT)	5mm(W)×8m(L)/PC 10PCS/BOX
LM-TP309Y (YELLOW)	9mm(W)×8m(L)/PC 10PCS/BOX
LM-TP309W (WHITE)	9mm(W)×8m(L)/PC 10PCS/BOX
LM-TP309T (TRANSPARENT)	9mm(W)×8m(L)/PC 10PCS/BOX
LM-TP312Y (YELLOW)	12mm(W)×8m(L)/PC 10PCS/BOX
LM-TP312W (WHITE)	12mm(W)×8m(L)/PC 10PCS/BOX

The specifications and design of the products in this catalogue will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



## MAX CO., LTD.

6-6, NIHONBASHI, HAKOZAKI-CHO, CHUO-KU, TOKYO, JAPAN  
PHONE: 81-3-3669-8131 FAX: 81-3-3669-7104  
Web: <http://www.max-ltd.co.jp/int/>

Distributor:



Printed on  
Recycled Paper  
PRINTED IN JAPAN  
O57514AN T0609